

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 847 739 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
17.06.1998 Bulletin 1998/25

(51) Int Cl.⁶: A61F 13/15

(21) Application number: 97308773.7

(22) Date of filing: 31.10.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 06.11.1996 JP 294096/96

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(72) Inventors:

- Hisada, Kenichi
Kawanoe-shi, Ehime-ken (JP)
- Yamaki, Rumi
Kawanoe-shi, Ehime-ken (JP)


(74) Representative: Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD1 7HE (GB)

(54) Pull-on disposable diaper

(57) A pull-on disposable diaper has front and rear waist regions and a crotch region extending therebetween. A waist-opening of the diaper is provided with

elastic members being stretchable circumferentially of the waist-opening. An absorbent core has a front end lying below the elastic members and a rear end extending beyond the elastic members so as to overlie them.

FIG.2

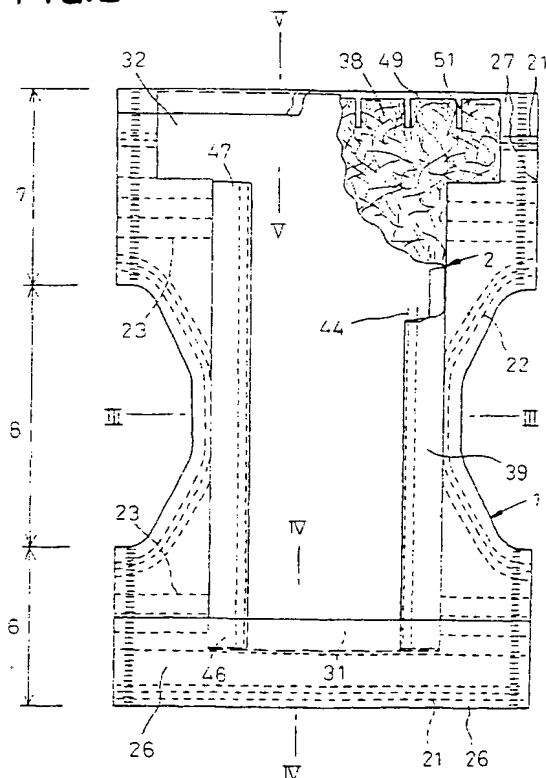

BEST AVAILABLE COPY

Printed by Jouve, 75001 PARIS (FR)

EP 0 847 739 A2

Description

This invention relates generally to pull-on disposable diapers and the like

Pull-on disposable diapers are well known. To improve a fitting of such diaper to the wearer's body, waist-opening and the leg-openings of the diaper have been provided in the proximity of their peripheral edges with elastic members bonded thereto in their longitudinally extended conditions. Body fluid absorbent core of the diaper is disposed between a liquid-permeable sheet and a liquid-impermeable sheet so as to extend across a crotch region from a front waist region into a rear waist region of the diaper. As viewed vertically of the diaper, longitudinally opposite ends of the absorbent core lying in the front and rear waist regions, respectively, underlie the elastic members associated with the waist-opening.

The pull-on diaper is apt to slip down more or less during use. While it is possible to pull up the pull-on diaper by holding an edge of the waist-opening, even such simple operation is often difficult for the aged and the sick. Although it is often relatively easy to pull up a front side of the diaper, it is often difficult for the aged and sick to hold a rear side of the diaper with his or her hands and thereby to pull up the rear side. In such a case, that wearer's hips might be left exposed.

In view of the problem as has been described above, it is a principal object of the invention to provide a diaper so improved that unintentional exposure of the wearer's hip can be minimized even if the diaper more or less slips down.

The object set forth above is achieved, according to the invention, by a pull-on disposable diaper comprising an absorbent including a liquid-permeable topsheet, a liquid-impermeable backsheet and an absorbent core disposed therebetween, and having a front waist region, a rear waist region and a crotch region extending therebetween, and a waist-opening and a pair of leg-openings defined by said respective regions wherein said waist-opening and said leg-openings are provided with elastic members being stretchable circumferentially of said respective openings and bonded in longitudinally extended conditions thereof, said disposable diaper being characterized in that said elastic members associated with said waist-opening extend across said front and rear waist regions substantially at the same level vertically of said diaper; and said absorbent core has a front end in said front waist region and a rear end in said rear waist region, said front end lies below said elastic members associated with the waist-opening and said absorbent core extending, in said rear waist region, upward beyond said elastic members associated with the waist-opening so that said absorbent core has a rear end lying above said elastic members associated with the waist-opening.

The pull-on disposable diaper according to the invention allows an unintentional exposure of the wearer's hip to be minimized since a depth of the rear waist region

down to the crotch region is dimensioned so as to be significantly larger than that of the front waist region.

Other and further objects, features and advantages of the invention will appear more fully from the following description.

Fig. 1 is a perspective view showing an embodiment of a pull-on diaper according to the invention as partially broken away;

Fig. 2 is a plan view showing the diaper unfolded back and forth from its state shown in Fig. 1, as partially broken away;

Fig. 3 is a sectional view taken along a line III-III in Fig. 2;

Fig. 4 is a sectional view taken along a line IV-IV in Fig. 2;

Fig. 5 is a sectional view taken along a line V-V in Fig. 2;

Fig. 6 is a view similar to Fig. 4 illustrating an alternative embodiment of the invention, and
Fig. 7 is a view similar to Fig. 5 illustrating the alternative embodiment of the invention.

A pull-on or shorts type disposable diaper shown by Fig. 1 in a perspective view as partially broken away basically comprises a supporter 1 in the form of shorts and an absorbent 2. The supporter 1 is composed of a front waist region 6, a rear waist region 7 and a crotch region 8 extending between the front and rear waist regions 6, 7. These front and rear waist regions 6, 7 are put flat and bonded together along their transversely opposite side edges at vertically intermittent spots 10 so as to form right and left closed side edges 13 of the waist regions, a waist-opening 14 and a pair of leg-openings 16. The supporter 1 is made of a laminated sheet 19 comprising a liquid-impermeable plastic film serving as a topsheet 17 and an air-permeable spun-bond nonwoven fabric serving as a backsheet 18. The waist-opening 14 and the leg-openings 16 are respectively provided in the proximity of their peripheral edges with a plurality of elastic members 21, 22 which are stretchable circumferentially of their openings, respectively. These elastic members 21, 22 each having a width of 0.5 ~ 3mm are laid between the topsheet 17 and the backsheet 18 and bonded in their longitudinally extended conditions to an inner surface of at least one of the topsheet 17 and the backsheet 18. Referring to Fig. 1, the elastic members 21 associated with the front and rear waist regions 6, 7 extend across these waist regions 6, 7 substantially at the same level above the bottom of the crotch region 8. Below the elastic members 21, the front and rear waist regions 6, 7 are additionally provided with a plurality of second elastic members 23. These second elastic members 23 each having a relatively large width of 3 ~ 10mm are stretchable circumferentially of the waist regions and bonded in their longitudinally extended conditions to an inner surface of at least one of the topsheet 17 and the backsheet 18. As shown, an upper end 27

of the rear waist region 7 sufficiently extends upward beyond the elastic members 21 to overlie an upper end 26 of the front waist region 6.

Fig. 2 is a plan view showing, as partially broken away, the diaper having the front and rear waist regions 6, 7 cut apart along the side edges 13 and longitudinally unfolded from the state shown in Fig. 1. Fig. 3 is a sectional view taken along a line III-III in Fig. 2 which divides the diaper in two longitudinally. As will be apparent from Fig. 2, the supporter 1 is substantially hourglass-shaped while the absorbent 2 is T-shaped and extends across the front and rear waist region 6, 7 and the crotch region 8 of the supporter 1. A front end 31 of the absorbent 2 lies in the front waist region 6 of the supporter 1 and terminates on this side of the elastic members 21. A rear end 32 which is transversely enlarged relative to the front end 31 lies in the rear waist region 7 and extends beyond the elastic members 21.

The absorbent 2 comprises a topsheet 36 made of a liquid-permeable spun-bond nonwoven fabric, a backsheet 37 made of a liquid-impermeable plastic film and a liquid-absorbent core 38 disposed between the topsheet 36 and the backsheet 37 and comprising fluff pulp fibers or a mixture of fluff pulp fibers and super-water-absorptive polymer particles. The backsheet 37 is bonded to the topsheet 17 of the supporter 1 by means of hot melt adhesive (not shown). The absorbent 2 is provided along its transversely opposite side edges extending in the proximity of the crotch region 8 with a pair of barrier cuffs 39 extending longitudinally of the absorbent 2. Each of the barrier cuffs 39 comprises a liquid-impermeable strip extending longitudinally of the diaper, which has one side edge 41 bonded to the backsheet 37 and the other side edge 42 extending in parallel to the side edge 41 and folded inwardly of the diaper. Each side edge 43 of the topsheet 36 is bonded to the barrier cuff 39 along its area defined between the side edges 41, 42. The side edge 42 folded inwardly of the diaper contains an elastic member 44 bonded in its longitudinally extended condition to an inner surface of the folded side edge 42. An inner surface of the barrier cuff 39 is bonded at its longitudinally opposite ends 46, 47 (Fig. 2) to an upper surface of the topsheet 36 by means of hot melt adhesive (not shown). With the diaper being in the state shown by Fig. 1, the elastic member 44 contracts and, in consequence, an intermediate portion of the barrier cuff 39 extending between the longitudinally opposite ends 46, 47 rises on the topsheet 36 so as to define a pocket which opens inwardly of the diaper. The absorbent core 38 has a plurality of parallel notches 51 extending forward (i.e., downward as viewed in Fig. 1) from a rear end 49 and these notches 51 allow the absorbent core 38 to be smoothly curved along the wearer's waist.

Figs. 4 and 5 are sectional views taken along lines IV-IV and V-V in Fig. 2, respectively. The topsheet 36 and the backsheet 37 covering the absorbent core 38 are bonded along their portions extending outward beyond a peripheral edge of the absorbent core 38 and

placed upon each other. In the front waist region 6, the topsheet 17 and the backsheet 18 of the supporter 1 are folded along the front end 26 of the supporter 1 inwardly of the diaper and partially cover the absorbent 2. The topsheet 17 folded in this manner is bonded to the backsheet 18 folded together with the topsheet 17, on one hand, and bonded to the topsheet 36 of the absorbent 2, on the other hand (Fig. 4). In the rear waist region 7, the topsheet 17 and the backsheet 18 are folded along the rear end 49 of the absorbent core 38 inwardly of the diaper and bonded to the topsheet 36 (Fig. 5). The arrangement that both the front end 31 and the rear end 32 of the absorbent 2 are covered with the topsheet 17 and the backsheet 18 assures that the wearer is free from an uncomfortable feeling of wetness even if body fluids spread to the front and rear ends 31, 32.

Figs. 6 and 7 are views similar to Figs. 4 and 5, respectively, showing still another alternative embodiment of the invention. Referring to Figs. 6 and 7, the topsheet 17 and the backsheet 18 of the supporter 1 longitudinally extend without being folded and the absorbent 2 merely rests on these topsheet 17 and the backsheet 18. Obviously, the absorbent 2 is bonded to the supporter 1 and the absorbent 2 might shift relative to the supporter 1. Arrangement illustrated by Figs. 6 and 7 is simpler than that illustrated by Figs. 4 and 5 and a manufacturing cost of the diaper can be correspondingly reduced.

It should be understood that the arrangements of the front waist region 6 illustrated by Figs. 4 and 6 and the arrangements of the rear waist region 7 illustrated by Figs. 5 and 7 may be selectively combined.

In the diaper configured as has been described herein above, the topsheet 17 and the backsheet 18 of the supporter 1 are not limited to those as illustrated and it is not critical whether they comprise liquid-permeable sheets or liquid-impermeable sheets. The topsheet 36 of the absorbent 2 also is not limited to the liquid-permeable nonwoven fabric and it is possible to replace this by a liquid-impermeable plastic film. For implementation of the invention, bonding of various components such as the topsheet 17 and the backsheet 18 of the supporter 1 as well as the topsheet 36 and the backsheet 37 of the absorbent 2 may be achieved not only by use of suitable adhesive such as hot melt adhesive but also by use of the known heat-sealing technique so long as any one or more of these sheets are of heat-sealable nature.

While the invention has been described hereinabove in connection with the pull-on disposable diaper basically comprising the supporter 1 in the form of shorts and the absorbent 2, the invention may be implemented by using the liquid-permeable topsheet 17 and the liquid-impermeable backsheet 18 to form the supporter 1 in the form of shorts and by disposing the T-shaped absorbent core 38 between these two sheets 17, 18.

The entire disclosure of Japanese Patent Application No. Hei8-294096 filed on November 6, 1996 including specification, claims, drawings and abstract are incorporated herein by reference in its entirety.

Having described our invention as related to the embodiment shown in the accompanying drawings, it is our intention that the invention be not limited by any of the details of description, unless otherwise specified, but rather be construed broadly within its spirit and scope as set out in the accompanying.

Claims

1. A pull-on disposable diaper comprising an absorbent including a liquid-permeable topsheet, a liquid-impermeable backsheet and an absorbent core disposed therebetween, and having a front waist region, a rear waist region and a crotch region extending therebetween, and a waist-opening and a pair of leg-openings defined by said respective regions wherein said waist-opening and said leg-openings are provided with elastic members being stretchable circumferentially of said respective openings and bonded thereto in longitudinally extended conditions thereof, said disposable diaper being characterized in that:
 - said elastic members associated with said waist-opening extend across said front and rear waist regions and said crotch regions substantially at the same level vertically of said diaper; and
 - said absorbent core has a front end in said front waist region and a rear end in said rear waist region, said front end lies below said elastic members associated with the waist-opening and said absorbent core extending, in said rear waist region, upward beyond said elastic members associated with the waist-opening so that said absorbent core has a rear end lying above said elastic members associated with the waist-opening
2. The diaper according to Claim 1, wherein, in said rear waist region, said rear end of said absorbent core lies above said elastic members associated with the waist-opening and a region extending in the proximity of said rear end are covered with a liquid-impermeable sheet.
3. The diaper according to Claim 1, wherein said absorbent core has a plurality of notches extending downward in parallel one to another with said rear end.
4. The diaper according to Claims 1, wherein said absorbent is bonded to an inner surface of a shorts-shaped member having said front and rear waist regions and said crotch region.

FIG. 1

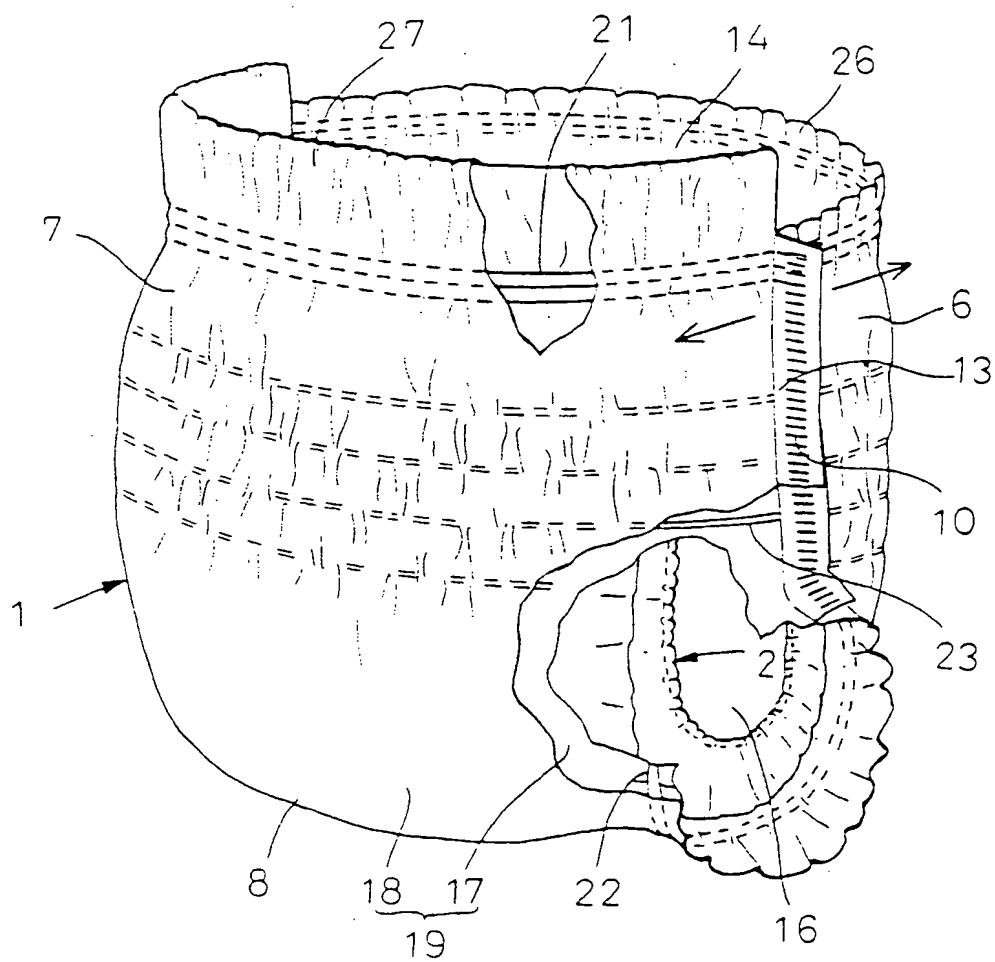


FIG.2

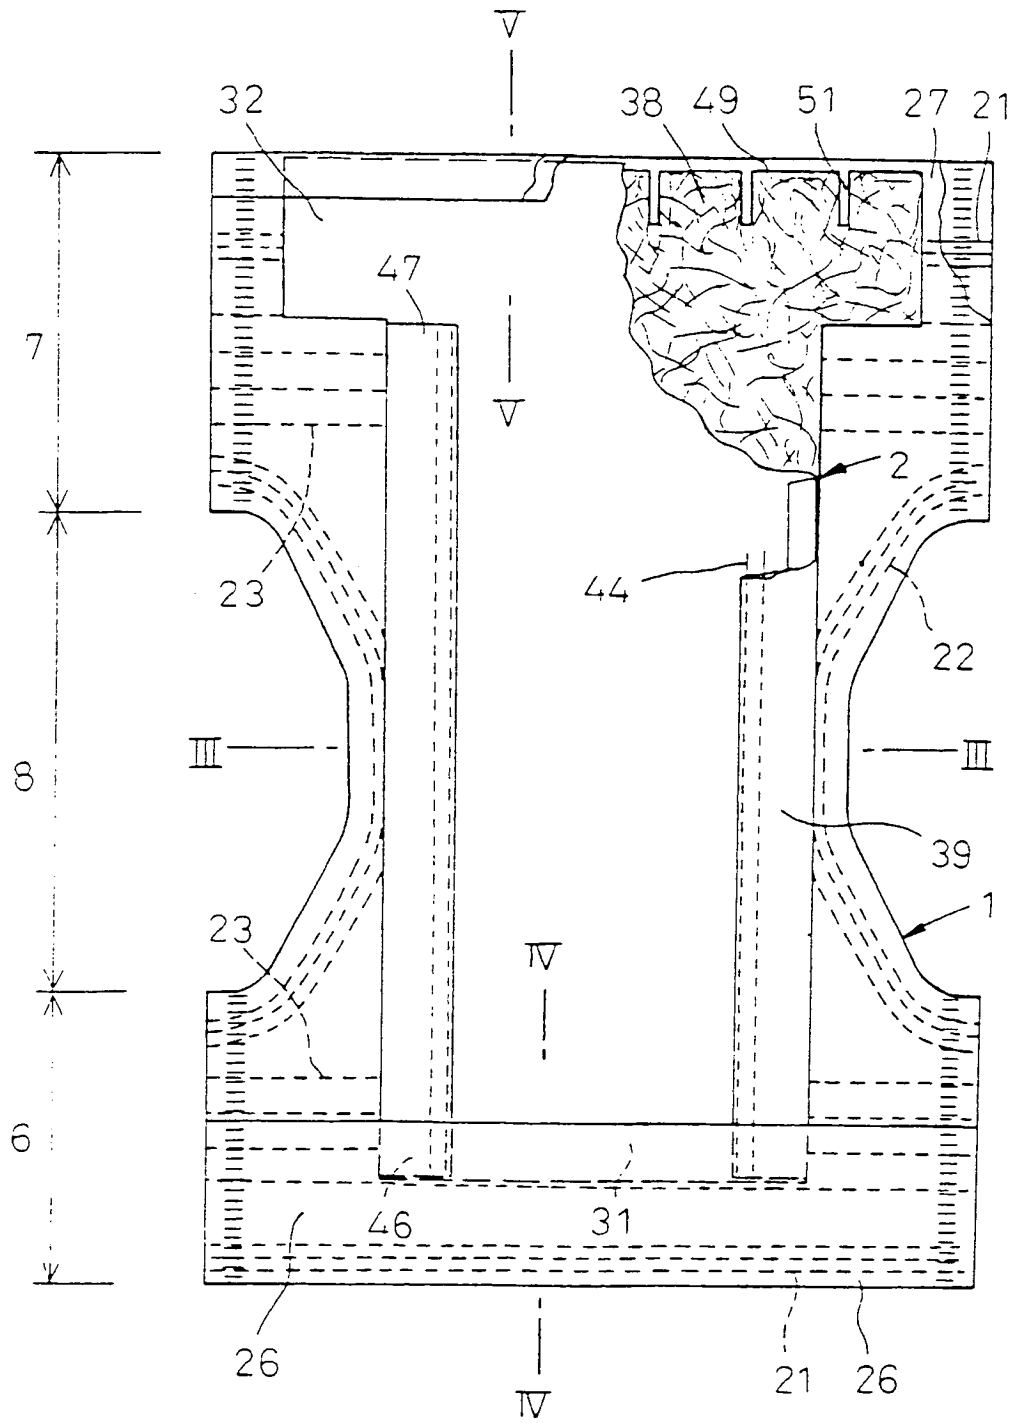


FIG.3

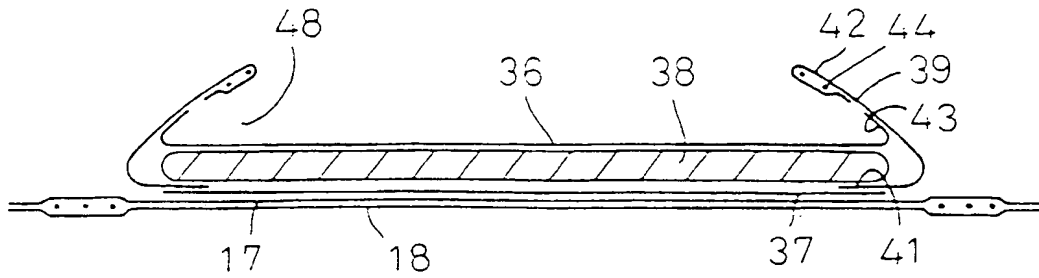


FIG.4

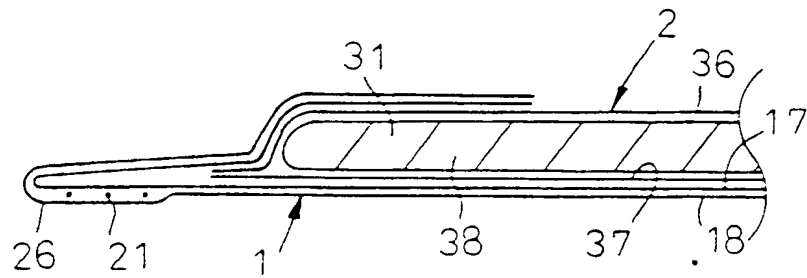


FIG.5

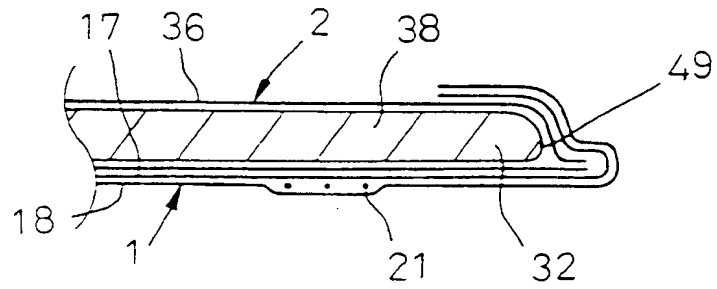


FIG.6


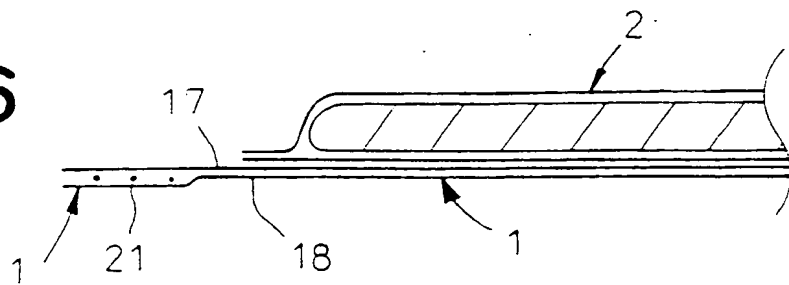


FIG.7





Europäisches Patentamt
European Patent Office
Office européen des brevets

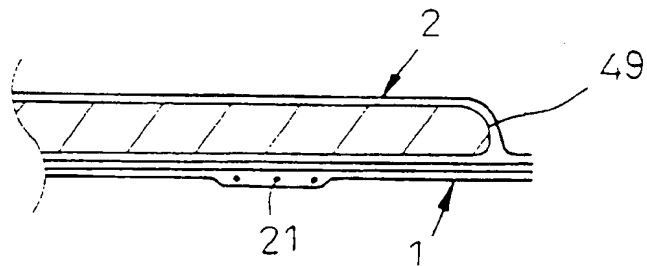

(11) EP 0 847 739 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
31.03.1999 Bulletin 1999/13

(51) Int Cl.⁶ A61F 13/15

(43) Date of publication A2:
17.06.1998 Bulletin 1998/25

(21) Application number: 97308773.7

(22) Date of filing: 31.10.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 06.11.1996 JP 294096/96

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)


(72) Inventors:
• Hisada, Kenichi
Kawanoe-shi, Ehime-ken (JP)
• Yamaki, Rumi
Kawanoe-shi, Ehime-ken (JP)

(74) Representative: Parry, Christopher Stephen
Saunders & Dolleymore,
9 Rickmansworth Road
Watford, Herts. WD1 7HE (GB)

(54) Pull-on disposable diaper

(57) A pull-on disposable diaper has front and rear waist regions and a crotch region extending therebetween. A waist-opening of the diaper is provided with elastic members being stretchable circumferentially of the waist-opening. An absorbent core has a front end lying below the elastic members and a rear end extending beyond the elastic members so as to overlie them.

FIG.2

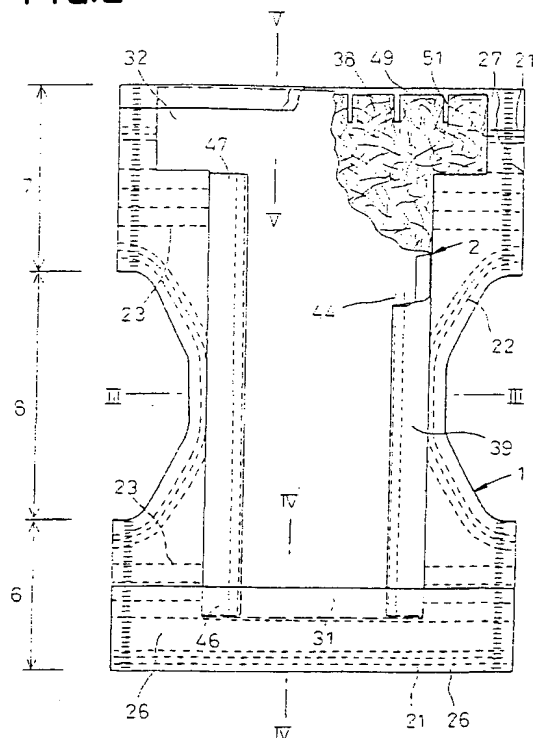



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 8773

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.6)
A	US 4 743 241 A (IGAUE TAKAMITSU ET AL) 10 May 1988 * column 4, line 8 - line 17 * * column 4, line 68 - column 5, line 14; figures 1,2 * ---	1-4	A61F13/15
A	EP 0 487 921 A (KAO CORP) 3 June 1992 * page 4, line 16 - line 23; figure 2 * ---	1	
A	US 4 710 189 A (LASH GLEN R) 1 December 1987 * column 6, line 49 - line 64; figure 1 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.CI.6)
			A61F
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 February 1999	Examiner Westermayer, W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 92 (P4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 8773

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4743241	A	10-05-1988	JP 1909487 C	09-03-1995
			JP 6037722 B	18-05-1994
			JP 62243806 A	24-10-1987
			JP 62243807 A	24-10-1987
			DE 3781710 A	22-10-1992
			EP 0241925 A	21-10-1987
			GB 2189133 A, B	21-10-1987
			KR 9501381 B	18-02-1995
EP 0487921	A	03-06-1992	JP 4166150 A	12-06-1992
			JP 7044945 B	17-05-1995
			JP 4364845 A	17-12-1992
			DE 69113213 D	26-10-1995
			US 5449353 A	12-09-1995
			US 5415649 A	16-05-1992
US 4710189	A	01-12-1987	BR 8401215 A	23-10-1984
			CA 1211602 A	23-09-1986
			DE 3472617 A	18-08-1988
			EG 16321 A	30-09-1987
			EP 0119825 A	26-09-1984
			GB 2136677 A, B	26-09-1984
			GR 81775 A	12-12-1984
			HK 58290 A	10-08-1990
			IE 55086 B	23-05-1990
			JP 2590054 B	12-03-1997
			JP 60017101 A	29-01-1985
			JP 2654350 B	17-09-1997
			JP 7047097 A	21-02-1995
			PH 25563 A	08-08-1991
			US 4808252 A	28-02-1989

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)